

Solargis API User Guide

- Overview of Solargis API
- Description of data available through the Solargis API
 - Satellite based PV and solar data - from the history up to current day
 - Meteorological data from numerical weather models - from the history up to current day
 - PV, solar and meteorological data from Numerical Weather Prediction (NWP) models - from the current day onwards
- Request Parameters
 - Location and Solar Resource Related Parameters
 - PV System Related Parameters
 - Parameters Controlling Request Processing
- Request Examples
 - FTP data delivery
 - Regular data request example for monitoring
 - On-time data request example
 - Forecast data request example
 - Minimalist PV data request example for monitoring
 - Minimalist solar radiation data request example for monitoring
 - Web Services
 - Example of XML request: with all options
 - Example of XML request: fixed mounted PV system
 - Example of XML request: tracking PV system with one horizontal axis in the north-south direction
 - Example of XML request: tracking PV system with one inclined axis in the north-south direction
 - Example of XML request: tracking PV system with one vertical axis
 - Example of XML request: tracking PV system with two axis
 - Example of XML response
 - FTP data delivery response

Overview of Solargis API

The purpose of the Solargis API is to provide automated access to [Solargis data and services](#) for computers over the web. API is a "user interface" for developers. Developers can automate getting Solargis products by using standard internet protocols (HTTP, FTP) and integrate Solargis data into processing chain (for evaluation, monitoring, forecasting, validation, calibration, etc.).

Solargis API	Availability of PV, solar and meteorological data					Technical features		
	historical	operational	real-time & nowcast	NWP forecast	long-term average	protocol	type of communication	content type
DataDelivery Web Service	YES	YES	YES	YES	NO	HTTP	synchronous	XML
pvPlanner Web Service	NO	NO	NO	NO	YES	HTTP	synchronous	XML
FTP data delivery	YES	YES	YES	YES	NO	FTP	asynchronous	CSV

Solargis API consists of two different endpoints:

- **DataDelivery Web Service (WS)** - the main service for accessing Solargis time series data. Both request and response are XML documents. The request parameters (XML elements and attributes) are formally described by XML Schema Definition documents (XSD). By using the schema, request or response can be verified programmatically. For this service we provide two architectural styles, the REST-like endpoint and SOAP endpoint. Look for more technical information [here](#). Authentication and billing is based on API key registered with the user. Please [contact us](#) to discuss details, set up trial or ask for a quotation.
- **pvPlanner Web Service** - this simple web service provides monthly long-term averaged data (including yearly value) of PV, solar and meteorological data with global coverage. The service is targeted for prospection and prefeasibility. Sending an XML request mimics the click on Calculate button in the interactive [Solargis pvPlanner](#) application. Request and response for the service is not described in this user guide. More information can be found [here](#).


Additionally, we provide **FTP data delivery** service where the request (CSV file) is stored in user's FTP directory. The service is then scheduled to deliver CSV response files regularly. Request processing is asynchronous - client puts the CSV request, server processes the request according to schedule (e.g., 4x per day, every hour), client then checks for the response files. The CSV request allows for multiple locations in one file. For pricing and setting up trial FTP user account, please [contact us](#).

Description of data available through the Solargis API

In case of solar and PV time series we use satellite data since available history up to present moment plus additional 4-5 hours ahead (in the regions where the real time & nowcasting satellite data is available). Satellite data includes historical (archived) data, operational data, real-time


and nowcasting data. Historical data ranges up to the last completed calendar month and can be considered as "definitive". Data in the current calendar month up to DAY-1 is so called "operational", and will be re-analysed in the next month using final versions of required data inputs (e.g. atmospheric data parameters). Important to note is that differences introduced with the re-analysis is typically small. Solar data in the current day is from the "real-time" satellite model and will be updated when day is finished. Then, based on latest satellite images we predict cloud motion vectors (CMV) in the range of next 4-5 hours ("nowcasting"). The present moment and short period before is covered by the nowcasting model data as the recent satellite scene is still in progress. This delay can take up to 30 minutes (depends on the satellite scanning frequency). Later on, after nowcasting time range, we use post-processed outputs from Numerical Weather Prediction models (NWP). Satellite-based data is seamlessly integrated with NWP forecasting data within one response. In case of locations where real-time & nowcasting data is not available, NWP data is used for the course of the current day. Also, not every location on the globe is supplied by more accurate ECMWF IFS data. In such case NOAA GFS data is used for all forecasted values. Meteorological data (TEMP, WS, AP, RH...) is comprised of NWP (NOAA GFS) modeled data.

Schema below shows how the data sources are integrated on an example of the the WS response having 9 days of data (generated at 12:00 of a given day).

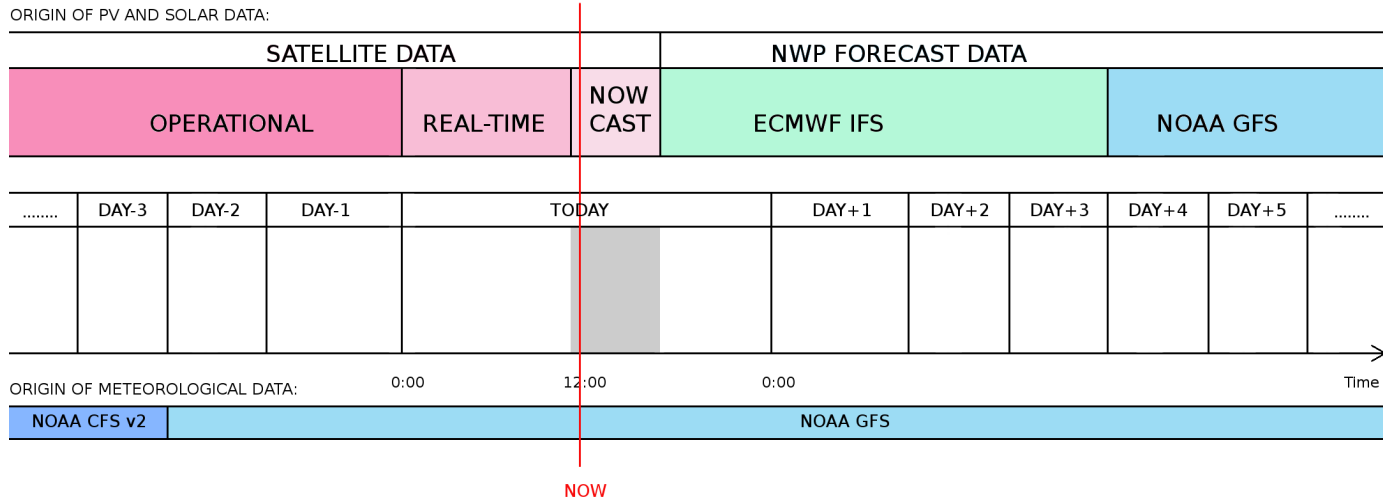

Satellite based PV and solar data - from the history up to current day

Current spatial coverage of satellite data available through the API. Click image to enlarge:

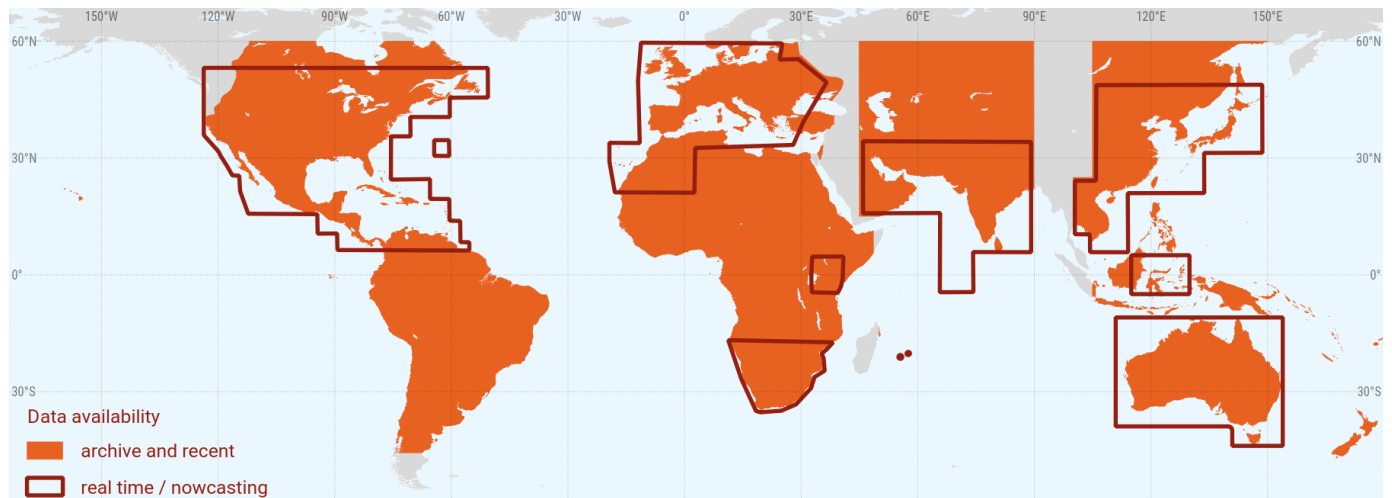

Orange regions on the map are accessible via the API and data is updated everyday (DAY-1 is available). In the subset of these regions, the real-time/nowcasting data is available (within the current day DAY+0, updated every 30 minute). Main data parameters include GHI, DNI, DIF, GTI, PVOUT.

The following table will help users to schedule time for sending requests to DataDelivery WS:

satellite region	data since	local DAY-1 is available at	real-time/nowcasting	original satellite scanning frequency
------------------	------------	-----------------------------	----------------------	---------------------------------------

GOES-E (America)	1999-01-01	10:00 UTC (USA), 13:00 UTC (whole region)	15-min resolution, 0-5 hours ahead, data updated every 30-min (usable via WS), shipping by FTP every 1 hour	30 minutes
MFG/MSG PRIME (Europe and Africa)	2005-01-01	03:45 UTC	15-min resolution, 0-5 hours ahead, data updated every 30-min (usable via WS), shipping by FTP every 1 hour	15 minutes
MTSAT/HIMAWARI (Asia and Pacific)	2006-07-01	22:40 UTC	10-min resolution, 0-5 hours ahead, data updated every 30-min (usable via WS), shipping by FTP every 1 hour	30 min. (10 min. since Jan 2016)
MFG/MSG IODC (Middle East, Central and South Asia)	1999-01-01	22:40 UTC	15-min resolution, 0-5 hours ahead, data updated every 30-min (usable via WS), shipping by FTP every 1 hour	30 min. (15 min. since Feb 2017)
GOES-W (America and Pacific)	1999-01-01	13:00 UTC (Hawaii)	planned	30 minutes

Each daily update of the data re-calculates values for two days backwards (DAY-1 and DAY-2). Monthly update (on the 3rd day of each calendar month) re-calculates the whole previous month as soon as it's completed. The purpose of these updates is described in this [article](#). We gradually expand spatial coverage of satellite data accessible via API. To request operational and historical data in the grey areas on the map, please use Solargis [climData](#) online shop.

Note: the data from orange zones in the map is also available by using interactive application [pvSpot](#) (daily operational data) and is accessible within minutes after purchase via [climData](#) online shop (as historical multi-year archived data).

Meteorological data from numerical weather models - from the history up to current day


Main data parameters include air temperature (TEMP), wind speed (WS), wind direction (WD), relative humidity (RH). Meteorological data comes from post-processed numerical weather models and is available globally. The DAY-1 and DAY-2 values are taken from NWP models - NOAA GFS (resp. ECMWF IFS) data sources (they are forecasted values). The preliminary meteorological data from GFS model is later updated with data from the NOAA CFS v2 data source (re-analysed archive data). Meteorological data for period DAY-3 and older can be considered as definitive.

PV, solar and meteorological data from Numerical Weather Prediction (NWP) models - from the current day onwards

Solargis forecast is based on post-processing of outputs from NWP models. The forecast time series include the following data parameters:

- Global horizontal irradiance, GHI [W/m^2] - from NWP
- Global tilted irradiance, GTI [W/m^2] - calculated parameter
- Air temperature at 2 m, TEMP [$^{\circ}C$] - from NWP
- PV electricity output, PVOUT [kWh] - calculated parameter
- Wind speed at 10 m, WS [m/s] - from NWP
- Wind direction at 10m, WD [$^{\circ}$] - from NWP
- Relative humidity, RH [%] - from NWP
- Atmospheric pressure, AP [hPa] - from NWP
- Precipitable water, PWAT [kg/m^2] - from NWP

Map of NWP forecast coverage:

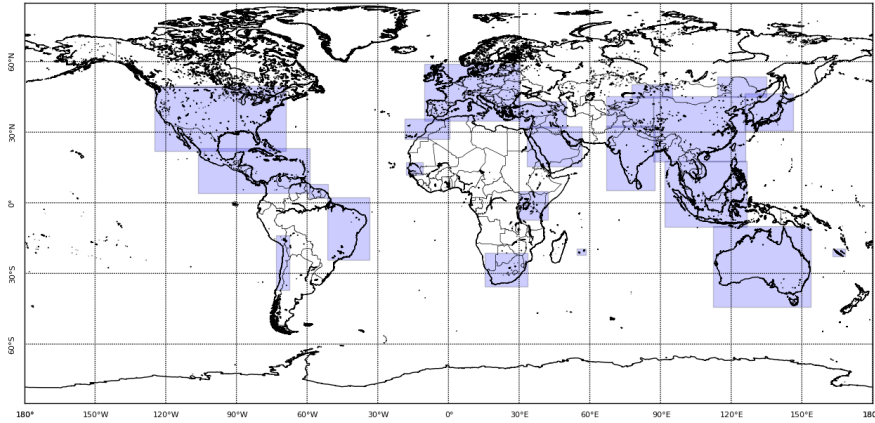

- violet regions: high resolution, higher reliability forecast data is available in the violet regions marked on the map. Upon request, we can start this kind of forecasting service for any other area. Source: IFS model from ECMWF, UK. Frequency of the update is at UTC hours 00, 06, 12 and 18 (4 forecasts runs per day, every 6 hours). Forecast range is from DAY+0 up to DAY+3. Original temporal resolution for the first 48 hours is 1 hour, hours 48-84 are received in 3 hourly original resolution, however in the final response this can be interpolated into higher resolution.
- the rest of the map (in white color) is covered by lower resolution global forecasting data from GFS model (NOAA, USA). Forecast range is from DAY+0 up to DAY+10. Frequency of the update is once in 6 hours.

Find more information about forecast [here](#).

Request Parameters

Most comprehensive set of parameters comes with FTP data delivery. Subset of the parameters is exposed via Web Services. Following list of parameters is created with regards to FTP data delivery (CSV request). The last column shows the parameter availability in the WS. The XPath notation is used to describe parameter location within XML request. More information about XML schema used in the WS can be found [here](#).

Location and Solar Resource Related Parameters

Parameter name in FTP data delivery	Required	Value type	Value unit	Default value	Value Range	Description	WS request equivalent (XPath)
lat	Yes	float	degree		-90, 90	Latitude	/dataDeliveryRequest/site/@lat
lng	Yes	float	degree		-180, 180	Longitude	/dataDeliveryRequest/site/@lat
alt	Yes	float	meters		-500, 8848	Altitude relative to sea level	/dataDeliveryRequest/site/terrain/@elevation
groundAlbedo	No	float	-	0.2	0, 1	Estimated annual value of reflection coefficient expressing amount of ground-reflected radiation, value ranges from zero (no reflection, black surface) to 1 (perfect reflection)	

geometry	No	string	-	FixedOneAngle	<ul style="list-style-type: none"> FixedOneAngle OneAxisVertical OneAxisInclined OneAxisHorizontalNS TwoAxisAstronomical 	Type of surface absorbing solar energy. It can be fixed or sun-tracking. It is assumed this typically is a PV module mounted on some construction.	/dataDeliveryRequest/site/geometry/@type
tilt	No	float	degree	0	0, 90	<ul style="list-style-type: none"> fixed surface self-tracking tilted surface rotation back tracking relative to self-tracking 	/dataDeliveryRequest/site/geometry/@tilt or /dataDeliveryRequest/site/geometry/@axisTilt in case of OneAxisInclined tracker
azimuth	No	float	degree	0, resp. 180	0, 360	True north-based azimuth (0=North, 90=East, 180=South, etc.). When this parameter is missing, defaults are following: if "lat" is less than 0 (southern hemisphere), azimuth defaults to 0, otherwise azimuth is 180 (northern hemisphere).	/dataDeliveryRequest/site/geometry/@azimuth


PV System Related Parameters

PV required parameters are required in case of PV output data is requested. For requesting solar radiation or meteorological data alone, PV parameters are not needed at all.

Parameter name in FTP data delivery	Required	Value type	Value unit	Default value	Value Range	Description	WS request equivalent (XPath)
pvInstalledPower	Yes	float	kWp		positive floats	Total installed power of the PV system in kilowatts-peak (kWp). The total PV system rating consists of a summation of the panel ratings measured in STC.	/dataDeliveryRequest/site/system/@installedPower
dateStartup	No	string				String formatted as "yyyy-mm-dd" (example 2015-01-01). Start up date of PV system (resp. unpacking of modules). This parameter is used for calculation of degradation (or aging) of modules. If omitted, degradation is not taken into account.	/dataDeliveryRequest/site/system/@dateStartup

pvInstallationType	Yes	string			<ul style="list-style-type: none"> • FREE_STANDING • ROOF_MOUNTED • BUILDING_INTEGRATED 	<p>This property of the PV system helps to estimate how modules are ventilated. For sloped roof with PV modules on rails tilted at the same angle as the roof choose 'ROOF_MOUNTED' value. For PV modules incorporated into building facade choose 'BUILDING_INTEGRATED' value. This option is considered as the worst ventilated. As the best ventilated option is considered free standing installation. This typically means stand-alone installation on tilted racks anchored into the ground. Also choose this option if a PV system is installed on a flat roof (similar to stand-alone installation). The string value is in this case "FREE_STANDING".</p>	/dataDeliveryRequest/site/system/@installationType
pvTrackerRotMin	No	string	pair of degrees	-180,180		<p>Parameter is a pair of limiting rotation angles for OneAxisVertical, OneAxisInclined, OneAxisHorizontalNS and TwoAxisAstronomical (its vertical axis) mounting geometries. If the tracker is purely theoretical (no limits) the default value of "-180,180" is used.</p>	/dataDeliveryRequest/site/geometry/@rotationLimitEast, /dataDeliveryRequest/site/geometry/@rotationLimitWest
pvTrackerRot2Min	No	string	pair of degrees	-90,90		<p>Parameter is a pair of limiting tilt angles for TwoAxisAstronomical (its horizontal axis) and OneAxisHorizontalEW trackers. Because of technical realizations of variable tilt often a linear actuator is used. Inclination angle seldom varies beyond 0 to 90, more often, it has smaller range e.g. "10,80". If the tracker is purely theoretical (no limits) the default value of "-90 to 90" should be used. Selecting tilt limits of "45,45" turns TwoAxisAstronomical tracker to the OneAxisVertical tracker tilted to 45 degree.</p>	/dataDeliveryRequest/site/geometry/@tiltLimitMin, /dataDeliveryRequest/site/geometry/@tiltLimitMax

pvTrackerBackTrack	No	string		FALSE	TRUE or FALSE	Default value "FALSE" corresponds to a standalone tracker without neighbors (best possible) moving within specified rotation limits (pvTrackerRotMin or/and pvTrackerRot2Min). Implemented for all trackers.	/dataDeliveryRequest/site/geometry/@backTracking
pvFieldSelfShading	No	string		FALSE	TRUE or FALSE	The parameter affects FixedOneAngle geometry, then OneAxisHorizontal NS and OneAxisInclined type of trackers with pvTrackerBackTrack=FALSE. When pvTrackerBackTrack=TRUE, the parameter does not make sense as self-shading is avoided. No other options are implemented. It is used to determine the impact of self (inter-row) shading on PV power production. When set to TRUE, the effect of self-shading is taken into account in calculation, otherwise the geometry is assumed without neighbors (best possible).	/dataDeliveryRequest/site/system/@selfShading
pvFieldColumnSpacingRelative	No	float		no spacing = isolated module		The parameter has effect only in case of tracking system when pvTrackerBackTrack is TRUE. It specifies the ratio between distance between the equivalent table legs and table width. Affected are trackers TwoAxisAstronomical, OneAxisVertical, OneAxisInclined, OneAxisHorizontalNS.	dataDeliveryRequest/site/system/topology/@relativeSpacing with dataDeliveryRequest/site/system/topology/@xsi:type="TopologyColumn"

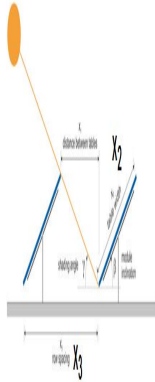pvFieldRowSpacingRelative	No	float		no spacing = isolated module		<p>In case of trackers the parameter has effect only when pvTrackerBackTrack is True. It specifies the ratio between distance between the equivalent table legs and table width. Affected are FixedOneAngle systems and TwoAxisAstronomical tracker.</p> <p>According to image below, $pvFieldRowSpacingRelative = x3 / x2$</p> 	<p>/dataDeliveryRequest/site/system/topology/@relativeSpacing</p> <p>with dataDeliveryRequest/site/system/topology/@xsi:type="TopologyRow"</p>
pvFieldTerrainSlope	No	float	degree	0	0, 90	<p>Slope of terrain, applied only when calculating self-shading effect of PV system with FixedOneAngle geometry. Defined in the same way as the parameter "tilt".</p>	/dataDeliveryRequest/site/terrain/@tilt
pvFieldTerrainAzimuth	No	float	degree	180	0,360	<p>Azimuth of sloped terrain, applied only when calculating self-shading effect of PV system with FixedOneAngle geometry. Defined in the same way as the parameter "azimuth".</p>	/dataDeliveryRequest/site/terrain/@azimuth

pvFieldTopologyType	No	string		<ul style="list-style-type: none"> • UNPROPORTIONAL_1 for CSI • PROPORTIONAL for all other module technologies 	<ul style="list-style-type: none"> • PROPORTIONAL • UNPROPORTIONAL_1 • UNPROPORTIONAL_2 • UNPROPORTIONAL_3 	<p>This parameter estimates a loss of PV system output when modules are self-shaded. The effect depends on wiring interconnection within a module. Shading influence ranges from 0% (no influence) to 100% (full influence) and is mapped to categories:</p> <ul style="list-style-type: none"> • PROPORTIONAL = 20% • UNPROPORTIONAL_1 = 40% • UNPROPORTIONAL_2 = 60% • UNPROPORTIONAL_3 = 80% <p>When parameter is missing at all, the self-shading influence is estimated to 5 %.</p>	/dataDeliveryRequest/site/system/topology/@type
pvModuleTechnology	Yes	string			<ul style="list-style-type: none"> • CSI • ASI • CDTE • CIS 	<p>Enumerated codes for materials used in PV modules. Use 'CSI' for crystalline silicon, 'ASI' for amorphous silicon, 'CDTE' for cadmium telluride, 'CIS' for copper indium selenide. For the estimate of module surface reflectance we use an approach described here.</p>	/dataDeliveryRequest/site/system/module/@type
pvModuleDegradation	No	float	percent	0.5	0, 100	<p>Estimated annual degradation of rated output power of PV modules. This parameter is only considered if "dateStartup" parameter is set.</p>	/dataDeliveryRequest/site/system/module/degradation
pvModuleDegradationFirstYear	No	float	percent	0.8	0, 100	<p>Estimated annual degradation of rated output power of PV modules in the first year of operation. If this parameter is not set, but "pvModuleDegradation" is present, the value of "pvModuleDegradation" will be used, otherwise default value 0.8% is considered. This parameter is only considered if "dateStartup" parameter is set.</p>	/dataDeliveryRequest/site/system/module/degradationFirstYear

pvModuleTempNOCT	No	float	degree Celsius	<p>according to "pvModuleTechnology":</p> <ul style="list-style-type: none"> • CSI=46°C • ASI=44°C • CDTE=45°C • CIS=47°C 		<p>Normal operating cell temperature. Float value of the temperature in degrees Celsius of a free standing PV module exposed to irradiance of 800 W/m² and ambient air temperature of 20°C and wind speed is 1 m/s. The value is given by manufacturer and only for ventilated free standing PV system.</p>	/dataDeliveryRequest/site/system/module/nominalOperatingCellTemp
pvModuleTempCoefficientPmax	No	float	percent per degree Celsius	<p>according to "pvModuleTechnology":</p> <ul style="list-style-type: none"> • CSI=-0.438%/°C • ASI=-0.18%/°C • CDTE=-0.297%/°C • CIS=-0.36%/°C 		<p>Negative percent float value representing the change in PV panel output power for temperatures other than 25°C (decrease of output power with raising temperature). This property is given at STC by manufacturer.</p>	/dataDeliveryRequest/site/system/module/PmaxCoeff
pvInverterEffConstant	No	float	percent	97.5	0, 100	<p>Value of inverter's efficiency known as Euro or CEC (California Energy Commission) efficiency. This value is a calculated weighted efficiency given by manufacturer. It gives a simplified picture about an inverter, in fact non-linear performance. Valid range of this value is practically 70%-100%. For better results, it is recommended to provide inverter efficiency curve (by using parameter "").</p>	/dataDeliveryRequest/site/system/inverter/efficiency/@percent

pvInverterEffCurve DataPairs	No	string	kW/percent pairs			<p>Efficiency of inverter is of non-linear nature, so it can be described as simplified curve defined as list of data points. Data point on the curve is defined by coordinates, where the x coordinate is absolute float value of input power in kilowatts (kW) and y coordinate is percent float value of the corresponding inverter's efficiency (%). This parameter accepts string value of this pattern: 'x1:y1 x2:y2 x3:y3 xn:yn'. A dot should be used as decimal separator, white space as a point delimiter and colon as x:y delimiter. We assume the last point determines the maximum input power of the inverter (with corresponding efficiency). Example efficiency curve of an inverter with the maximum input power of 3 kW is '0:85.6 0.5:96.2 1:98 1.5:97 2:97 2.5:96 3.0:96'. It is assumed, that one efficiency curve is valid for all inverters of the PV system (their powers are summed).</p>	/dataDeliveryRequest/site/system/inverter/efficiency/@dataPairs
pvInverterLimitation ACPower	No	float	kW			<p>Maximum AC power when inverter limits (clips) AC output. Clipping refers to the situation where the AC power output of an inverter is limited due to the peak rating of the inverter (the parameter value in kW), even though additional power may still be available from the solar modules. If you have power factor (PF) and AC limit in kVA available, use this formula: $PF * AC_limit_kVA = kW$, which is the value of this parameter.</p>	/dataDeliveryRequest/site/system/inverter/limitationACPower

pvLossesDCOther	No	float	percent	5.4	0, 100	Estimated integration of specific other DC losses (see pvLossesDCMismatch, pvLossesDCCables and pvLossesDCPollutionSnow parameters) into one number. Maximum simplification for DC losses.	/dataDeliveryRequest/site/system/losses/@dc
pvLossesDCMismatch	No	float	percent	1.0	0, 100	Share of estimated mismatch losses within the value of pvLossesDCOther parameter.	/dataDeliveryRequest/site/system/losses/dcLosses/@mismatch
pvLossesDCCables	No	float	percent	2.0	0, 100	Share of estimated cabling losses within the value of pvLossesDCOther parameter.	/dataDeliveryRequest/site/system/losses/dcLosses/@cables
pvLossesDCPollutionSnowMonth	No	string	formatted list of float percent			Distribution of the pvLossesDCPollutionSnow value into 12 average months. Example: "5.0,2.0,2.0,2.0,0.0,0.0,0.0,0.0,0.0,0.0,2.0,5.0,8.0". Value of the parameter must consist of 12 percent float values delimited with comma. If this parameter has a value, it takes precedence over pvLossesDCPollutionSnow parameter.	/dataDeliveryRequest/site/system/losses/dcLosses/@monthlySnowPollution
pvLossesDCPollutionSnow	No	float	percent	2.5	0, 100	Share of estimated dirt and snow losses within the value of pvLossesDCOther parameter.	/dataDeliveryRequest/site/system/losses/dcLosses/@snowPollution
pvLossesAC	No	float	percent	1.5	0, 100	Estimated integration of specific AC losses (see pvLossesACCable and pvLossesACTransformer parameters) into one number. Maximum simplification for AC losses.	/dataDeliveryRequest/site/system/losses/@ac
pvLossesACCable	No	float	percent	0.5	0, 100	Share of estimated cabling losses within the value of pvLossesAC parameter.	/dataDeliveryRequest/site/system/losses/acLosses/@cables
pvLossesACTransformer	No	float	percent	1.0	0, 100	Share of estimated transformer losses within the value of pvLossesAC parameter.	/dataDeliveryRequest/site/system/losses/acLosses/@transformer

Parameters Controlling Request Processing

Parameter name in FTP data delivery	Required	Value type	Value unit	Default value	Value Range	Description	WS request equivalent (XPath)
siteld	Yes	string				Unique identification of one request (one row in CSV request). example: "DETROIT_roof_1"	/dataDeliveryRequest/site/@id

fromDate	No	string				String formatted as "yyyymmdd" (example "20150101").	/dataDeliveryRequest/@dateFrom
toDate	No	string				String formatted as "yyyymmdd" (example "20150101").	/dataDeliveryRequest/@dateTo
forecastFromDay	Yes (if forecast is needed)	integer				For forecast request only. In case of FTP data delivery, forecast processing is indicated by file name of the CSV request file. Then this parameter is taken into account. 0= DAY+0, 1=DAY+1, etc.	N/A
forecastToDay	Yes (if forecast is needed)	integer				For forecast request only. In case of FTP data delivery, forecast processing is indicated by file name of the CSV request file. Then this parameter is taken into account. 1= DAY+1, 2=DAY+2, etc. up to 10.	N/A
summarization	Yes	string			<ul style="list-style-type: none"> • MIN_15 • MIN_30 • HOURLY • DAILY • MONTHLY • YEARLY 	This parameter defines time resolution of output data. Original satellite and meteorological data are in various time steps (e.g. MSG satellite: 15 min, GOES-EAST satellite: 30 min, GFS weather model: 3 hour). When finer summarization is requested, the data will be interpolated into desired time step. In other words, you can request time resolution of 10 minutes even if the original dataset is not available in such resolution. The "monthly-longterm" summarization means 12 long-term monthly averaged entries + 1 annual entry in the response.	/dataDeliveryRequest/processing/@summarization
processingKeys	Yes	string			<ul style="list-style-type: none"> • GHI • DNI • DIF • GTI • SE • SA • TEMP • AP • RH • WS • WD • PVOOUT • PREC • SWE • TMOD 	The white-space-separated list of variable codes which will be included in the response (example: "GHI DIF TEMP WS WD"); <ul style="list-style-type: none"> • GHI: Global horizontal radiation, (W/m² for instantaneous values, Wh/m² for hourly values, kWh/m² for daily, monthly and yearly values). 	/dataDeliveryRequest/processing/@key

- DNI: Direct normal radiation, (W/m^2 for instantaneous values, Wh/m^2 for hourly values, kWh/m^2 for daily, monthly and yearly values).
- DIF: Diffuse horizontal radiation, (W/m^2 for instantaneous values, Wh/m^2 for hourly values, kWh/m^2 for daily, monthly and yearly values).
- GTI: Global tilted radiation, (W/m^2 for instantaneous values, Wh/m^2 for hourly values, kWh/m^2 for daily, monthly and yearly values). Consider setting up the "geometry", "azimuth" and "tilt" parameters, otherwise default will be horizontal surface.
- SE: Sun altitude (elevation) angle (degrees).
- SA: Sun azimuth angle (degrees).
- TEMP: Air temperature at 2 m (degrees Celsius).
- AP: Atmospheric pressure (hPa).
- RH: Relative humidity (%).
- WS: Wind speed at 10 m (m/s).
- WD: Wind direction (degrees), true north-based azimuth. Do not request this variable in time steps above "hourly".
- PVOU: Output from PV system (kW for instantaneous, otherwise kWh). Consider setting up "geometry" and related parameters and required PV-related parameters.
- PREC: Precipitation (rainfall). Unit is kg/m^2 .
- SWE: Snow Water Equivalent. Daytime values are defined only (night time is set to -99.0). Unit is kg/m^2 .

						<ul style="list-style-type: none"> TMOD: PV module temperature (degrees Celsius). The PV configuration has to be defined. 	
timeZone	No	int		0 (=UTC+0)	-12, 12	<p>Signed integer. Time zone with hourly precision. Value defines the time zone of output data and it is used for all summarizations. For daily and monthly summarization, the time zone it is activated automatically in the background. This is important for summarization of whole days, otherwise daily summary in UTC+0 would for Japan or Hawaii end up in putting together data from two different local days. For hourly and shorter time steps time zone must be specified, otherwise UTC+0 is used. All the satellite model results are calculated and internally stored in UTC+0. Therefore depending on the requested time zone value, the data reader automatically extends period from which data are read to acquire completed local day. For example, one whole day D (0-24h) in the time zone of UTC-5 will be read from UTC database as D (5-24 hours) and D+1 (0-5 hours).</p>	/dataDeliveryRequest/processing/timeZone, timeZone must be in format \"GMT+hh\" or \"GMT-hh\"
timeStampType	No	string		CENTER	<ul style="list-style-type: none"> CENTER END START 	<p>The parameter can be used in hourly or even in sub-hourly time steps when averaging of more values occurred within time interval. Example: let's say the value is the result of averaging of more occurrences within hourly interval from 15:00 to 16:00. If the value of the parameter is "CENTER", the value is time-stamped at 15:30, in case of "END" at 16:00 and finally "START" at 15:00.</p>	/dataDeliveryRequest/processing/timeStampType, value START is not supported in Web services

satelliteTimeStamp	No	string		TRUE	TRUE or FALSE	This parameter is used to preserve time stamp of satellite data acquisition. The data for given position are recorded by satellite in exact moment given by scanning speed of the instrument. For example MSG data scan starts nearby south pole at time T and data for Europe are recorded with 10-13 minutes delay from nominal (start) scan time. To present the original satellite information and avoid degradation of the information content by temporal interpolation it is good to preserve local time stamp of satellite data acquisition.	
terrainShading	No	string		FALSE	TRUE or FALSE	Apply or not terrain (or horizon) shading (whether default SRTM terrain or local horizon passed by user).	/dataDeliveryRequest/processing/@terrainShading
userHorizon	No	string				Formatted string describing custom local horizon. The horizon can be in any resolution, it will be interpolated internally. Example (sun azimuth:sun elevation pairs): 0:16.2,0.5:16.2,1:16,1.5:16.2:16,2.5:16,3:15.8,...358.5:16,359:16.2. Azimuth is true north-based (North=0 degree).	/dataDeliveryRequest/site/horizon
active	No	string		TRUE	TRUE or FALSE	User can toggle if particular request (=site, =row in CSV request file) should be processed or not.	N/A

Request Examples

FTP data delivery

Data request CSV file must have header with parameter names on a first row. Below header, there can be unlimited number of rows with parameter values (site requests). Order of parameters is optional.

Regular data request example for monitoring

Note, there are no "fromDate" and "toDate" parameters. Date period is resolved according to contract and managed by the automated process.

siteId	lat	lng	alt	geometry	azimuth	tilt	summary	terrainShading	processingK	fromDate	toDate	active	timeZone	satelliteTime	timeStampT
PV _pl ant _e x a m p l e	48.61259	20.827079	20	OneAxisHorizontalNS	180	20	FixedOneAngle	FALSE	GHI GTI DIF TEMP	20120601	20121130	TRUE	0	TRUE	CENTER

On-time data request example

Parameters "fromDate" and "toDate" are required in this case. Such request is processed only once. Note, only radiation and temperature is requested in this case, so no PV system settings are needed.

siteId	lat	lng	alt	geometry	azimuth	tilt	summary	terrainShading	processingK	fromDate	toDate	active	timeZone	satelliteTime	timeStampT
Variant_4	48.61259	20.827079	20	FixedOneAngle	180	20	FixedOneAngle	FALSE	GHI GTI DIF TEMP	20120601	20121130	TRUE	0	TRUE	CENTER

Forecast data request example

Note the usage of "forecastFromDay" and "forecastToDay" parameters. Typically data will processed each 12 hours forecasting period since today (forecastFromDay=0) up to 7 days ahead (forecastToDay=7).

siteId	lat	lng	alt	geometry	azimuth	tilt	summarization	processingKeys	pvinfosTechnology	pvinfosInstallationType	pvinfosInstalledPower	active	ti	ti	me	z	me	z	me	
1	48.61259	17.650402	20	FixedOneAngle	180	0	hourly	GHI GTI DIF TEMP PVOUT	CSI	FREE_STANDING	100	TRUE								

Minimalist PV data request example for monitoring

Note, degradation is not considered (missing "dateStartup" parameter). This request will be processed each day according to schedule for any given satellite as soon as local day is finished. The DAY-1 is delivered.

siteId	lat	lng	alt	geometry	azimuth	tilt	summarization	processingKeys	pvinfosTechnology	pvinfosInstallationType	pvinfosInstalledPower	active
PV_plant_example	48.61259	17.650402	20	FixedOneAngle	180	0	hourly	GHI GTI DIF TEMP PVOUT	CSI	FREE_STANDING	100	TRUE

Minimalist solar radiation data request example for monitoring

This request will be processed each day according to schedule for any given satellite as soon as local day is finished. The DAY-1 is delivered.

siteId	lat	lng	alt	summarization	processingKeys	active
MySite1	48.61259	17.650402	20	hourly	GHI DIF TEMP	TRUE

Web Services

The client (typically a computer) will send the request and wait for the response. Developers can test various requests directly from web browser by using e.g. [REST Client for Firefox](#) or via native application like [Postman](#). Before sending requests user must set the HTTP Method to "POST", define endpoint URL to: <https://solargis.info/ws/rest/datadelivery/request?key=demo> and also set a header to "Content-Type: application/xml". Then send the examples below in the body of the request and explore response. Typically, developers will create client code to send requests and handle responses scheduled in time. For all technicalities visit this link. In the next section there are examples of XML requests. They can serve as starter templates for typical scenarios.

Example of XML request: with all options

Some elements or attributes are mutually exclusive and are commented-out in the listing e.g., user must decide which geometry type to simulate.

```
<ws:dataDeliveryRequest dateFrom="2017-09-22" dateTo="2017-09-30"
  xmlns="http://geomodel.eu/schema/data/request"
  xmlns:ws="http://geomodel.eu/schema/ws/data"
  xmlns:geo="http://geomodel.eu/schema/common/geo"
  xmlns:pv="http://geomodel.eu/schema/common/pv"
```

```

xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">

<site id="demo" lat="48.61259" lng="20.827079">
  <geo:terrain elevation="120" azimuth="180" tilt="5"/>
  <geo:horizon>0:3.6 123:5.6 359:6</geo:horizon>
  <pv:geometry xsi:type="pv:GeometryFixedOneAngle" azimuth="180"
tilt="25"/>
  <!-- <pv:geometry xsi:type="pv:GeometryOneAxisHorizontalNS"
rotationLimitEast="-90" rotationLimitWest="90" backTracking="true"/> -->
  <!-- <pv:geometry xsi:type="pv:GeometryOneAxisInclinedNS" axisTilt="
30" rotationLimitEast="-90" rotationLimitWest="90" backTracking="true"/> --
>
  <!-- <pv:geometry xsi:type="pv:GeometryOneAxisVertical" tilt="25"
rotationLimitEast="-180" rotationLimitWest="180" backTracking="true"/> -->
  <!-- <pv:geometry xsi:type="pv:GeometryTwoAxisAstronomical"
rotationLimitEast="-180" rotationLimitWest="180"
          tiltLimitMin="10" tiltLimitMax="60"
backTracking="true"/> -->
  <pv:system installedPower="1000" installationType="FREE_STANDING"
dateStartup="2014-01-03" selfShading="true">
    <pv:module type="CSI">
      <pv:degradation>0.3</pv:degradation>
      <pv:degradationFirstYear>0.8</pv:degradationFirstYear>
      <pv:nominalOperatingCellTemp>45</pv:
nominalOperatingCellTemp>
      <pv:PmaxCoeff>-0.38</pv:PmaxCoeff>
    </pv:module>
    <pv:inverter>
      <pv:efficiency xsi:type="pv:EfficiencyConstant" percent="
97.5"/>
      <!--<pv:efficiency xsi:type="pv:EfficiencyCurve"
dataPairs="0:20 50:60 100:80 150:90 233:97.5 350:97 466:96.5 583:96 700:
95.5 750:93.33 800:87.5 850:82.35 900:77.8 950:73.7"/>-->
      <pv:limitationACPower>900</pv:limitationACPower>
    </pv:inverter>
    <pv:losses>
      <pv:acLosses cables="0.1" transformer="0.9"/>
      <pv:dcLosses cables="0.2" mismatch="0.3" snowPollution="
3.0"/>
      <!-- <pv:dcLosses cables="0.2" mismatch="0.3"
monthlySnowPollution="5 5.2 3 1 1 1 1 1 1 1 2 4"/> -->
    </pv:losses>
    <pv:topology xsi:type="pv:TopologySimple" relativeSpacing="
2.4" type="UNPROPORTIONAL2"/>
    <!-- <pv:topology xsi:type="pv:TopologyColumn"
relativeSpacing="2.5" type="UNPROPORTIONAL2"/> -->
  </pv:system>
</site>
<processing key="GHI GTI TEMP WS PVOUT" summarization="HOURLY"
terrainShading="true">
  <timeZone>GMT+01</timeZone>
  <timestampType>END</timestampType>
</processing>

```

```
</ws:dataDeliveryRequest>
```

Example of XML request: fixed mounted PV system

```
<ws:dataDeliveryRequest dateFrom="2018-02-11" dateTo="2018-02-11"
  xmlns="http://geomodel.eu/schema/data/request"
  xmlns:ws="http://geomodel.eu/schema/ws/data"
  xmlns:geo="http://geomodel.eu/schema/common/geo"
  xmlns:pv="http://geomodel.eu/schema/common/pv"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">

  <site id="demo" lat="48.61259" lng="20.827079">
    <geo:terrain elevation="246" azimuth="180" tilt="2"/>
    <!--azimuth and tilt of terrain affects PVOUT values only if
selfShading attribute of the system is true-->
    <pv:geometry xsi:type="pv:GeometryFixedOneAngle" tilt="25"
azimuth="180"/> <!--azimuth and tilt attributes are required-->
    <pv:system installedPower="1" installationType="FREE_STANDING"
selfShading="true">
      <!--by setting selfShading=true we can switch on the
impact of inter-row shading on PVOUT-->
      <pv:module type="CSI"></pv:module>
      <pv:inverter></pv:inverter>
      <pv:losses></pv:losses>
      <pv:topology xsi:type="pv:TopologyRow" relativeSpacing="
2.5" type="UNPROPORTIONAL2"/>
    </pv:system>
  </site>
  <processing key="GTI TEMP PVOUT" summarization="HOURLY"
terrainShading="true">
    <timeZone>GMT+01</timeZone>
    <timestampType>CENTER</timestampType>
  </processing>
</ws:dataDeliveryRequest>
```

Example of XML request: tracking PV system with one horizontal axis in the north-south direction

```

<ws:dataDeliveryRequest dateFrom="2018-02-11" dateTo="2018-02-11"
  xmlns="http://geomodel.eu/schema/data/request"
  xmlns:ws="http://geomodel.eu/schema/ws/data"
  xmlns:geo="http://geomodel.eu/schema/common/geo"
  xmlns:pv="http://geomodel.eu/schema/common/pv"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <site id="demo" lat="48.61259" lng="20.827079">
    <pv:geometry xsi:type="pv:GeometryOneAxisHorizontalNS"
rotationLimitEast="-90" rotationLimitWest="90" backTracking="true"/>
      <!-- rotation limits are defined as tilt of tracker table
relative to its central position (horizontal=0 deg.), limits are usually
symmetrical-->
      <pv:system installedPower="1" installationType="FREE_STANDING"
selfShading="false">
        <!--by setting selfShading=true and backTracking=false we can
switch on the impact of inter-row shading on PVOUT-->
        <pv:module type="CSI"></pv:module>
        <pv:inverter></pv:inverter>
        <pv:losses></pv:losses>
        <pv:topology xsi:type="pv:TopologyColumn" relativeSpacing="
2.5" type="UNPROPORTIONAL2"/>
      </pv:system>
    </site>
    <processing key="GTI PVOUT TEMP" summarization="HOURLY"
terrainShading="true">
      <timeZone>GMT+01</timeZone>
      <timestampType>CENTER</timestampType>
    </processing>
  </ws:dataDeliveryRequest>

```

Example of XML request: tracking PV system with one inclined axis in the north-south direction

```

<ws:dataDeliveryRequest dateFrom="2018-02-11" dateTo="2018-02-11"
  xmlns="http://geomodel.eu/schema/data/request"
  xmlns:ws="http://geomodel.eu/schema/ws/data"
  xmlns:geo="http://geomodel.eu/schema/common/geo"
  xmlns:pv="http://geomodel.eu/schema/common/pv"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">

  <site id="demo" lat="48.61259" lng="20.827079">
    <pv:geometry xsi:type="pv:GeometryOneAxisInclinedNS" axisTilt="30"
rotationLimitEast="-90" rotationLimitWest="90" backTracking="true"/>
    <!-- tilt of tracker axis defaults to 30 degrees if the
attribute axisTilt is omitted -->
    <!-- tracker axis is tilted towards equator on each Earth
hemisphere, e.g. towards 180 deg. azimuth on the Northern hemisphere, 0
deg. azimuth for the Southern hemisphere-->
    <!-- rotation limits are defined as tilt of tracker table
relative to its central position (in this case inclined plane), limits are
usually symmetrical-->
    <pv:system installedPower="1" installationType="FREE_STANDING"
selfShading="false">
    <!--by setting selfShading=true and backTracking=false we can
switch on the impact of inter-row shading on PVOUT -->
    <pv:module type="CSI"></pv:module>
    <pv:inverter></pv:inverter>
    <pv:losses></pv:losses>
    <pv:topology xsi:type="pv:TopologyColumn" relativeSpacing="
2.4" type="UNPROPORTIONAL2"/>
    </pv:system>
  </site>
  <processing key="GTI PVOUT TEMP" summarization="HOURLY"
terrainShading="true">
    <timeZone>GMT+01</timeZone>
    <timestampType>CENTER</timestampType>
  </processing>
</ws:dataDeliveryRequest>

```

Example of XML request: tracking PV system with one vertical axis

```

<ws:dataDeliveryRequest dateFrom="2018-02-11" dateTo="2018-02-11"
  xmlns="http://geomodel.eu/schema/data/request"
  xmlns:ws="http://geomodel.eu/schema/ws/data"
  xmlns:geo="http://geomodel.eu/schema/common/geo"
  xmlns:pv="http://geomodel.eu/schema/common/pv"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <site id="demo" lat="48.61259" lng="20.827079">
    <pv:geometry xsi:type="pv:GeometryOneAxisVertical" tilt="25"
rotationLimitEast="-180" rotationLimitWest="180" backTracking="true"/>
      <!-- tilt of module defaults to 30 degrees if the
attribute tilt is omitted -->
      <!--rotation limits of the vertical axis are defined relative to 0
deg. (initial tracker position) from -180 to 180 deg with -90 deg.(east)
and +90 deg. (west), regardless of the hemisphere-->
      <pv:system installedPower="1" installationType="FREE_STANDING">
        <pv:module type="CSI"></pv:module>
        <pv:inverter></pv:inverter>
        <pv:losses></pv:losses>
        <pv:topology xsi:type="pv:TopologyColumn" relativeSpacing="
2.5" type="UNPROPORTIONAL2"/>
          <!--with this tracker, constructions are equally
distributed in both directions, i.e. column spacing = row spacing -->
        </pv:system>
      </site>
    <processing key="GTI PVOUT TEMP" summarization="HOURLY"
terrainShading="true">
      <timeZone>GMT+01</timeZone>
      <timestampType>CENTER</timestampType>
    </processing>
  </ws:dataDeliveryRequest>

```

Example of XML request: tracking PV system with two axis

```

<ws:dataDeliveryRequest dateFrom="2018-02-11" dateTo="2018-02-11"
  xmlns="http://geomodel.eu/schema/data/request"
  xmlns:ws="http://geomodel.eu/schema/ws/data"
  xmlns:geo="http://geomodel.eu/schema/common/geo"
  xmlns:pv="http://geomodel.eu/schema/common/pv"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <site id="demo" lat="48.61259" lng="20.827079">
    <pv:geometry xsi:type="pv:GeometryTwoAxisAstronomical"
rotationLimitEast="-180" rotationLimitWest="180" tiltLimitMin="10"
tiltLimitMax="60" backTracking="true"/>
    <!--rotation limits of vertical axis are defined relative
to 0 deg. (initial tracker position) from -180 to 180 deg with -90 deg.
=east and +90 deg.=west, regardless of hemisphere-->
    <pv:system installedPower="1" installationType="FREE_STANDING">
      <pv:module type="CSI"></pv:module>
      <pv:inverter></pv:inverter>
      <pv:losses></pv:losses>
      <pv:topology xsi:type="pv:TopologyColumn" relativeSpacing="
1.5" type="UNPROPORTIONAL2"/>
      <!--with this tracker, constructions are equally
distributed in both directions, i.e. column spacing = row spacing -->
    </pv:system>
  </site>
  <processing key="GTI PVOUT" summarization="DAILY" terrainShading="true"
>
    <timeZone>GMT+01</timeZone>
    <timestampType>CENTER</timestampType>
  </processing>
</ws:dataDeliveryRequest>

```

Setting "dateFrom" and "dateTo" is required in all cases. User can control time zone for output data in two ways. Either by using "timeZone" element or by the "dateFrom" and "dateTo" attributes of "dataDeliveryRequest" element. The "timeZone" element takes precedence over "dateFrom" and "dateTo" attributes. There is no difference between historical and forecast data in case of XML request. Note, there are no "forecastFromDay" and "forecastToDay" parameters as with FTP data delivery. Instead, user can explicitly set the date period needed to be forecast-ed (max. 10 days ahead).

Example of XML response

The root element of the XML response is the <dataDeliveryResponse> element with one <site> element inside. The <site> has the 'id' attribute referencing the site in the request. The <site> consists of <metadata> section, one <columns> element and multiple <row> items. The <row> holds timestamp information in the 'dateTime' attribute and the numeric values in space-separated text value of the 'values' attribute. Values are sorted in the same order as the value of <columns> element to pair value with the parameter name.

```

<?xml version="1.0"?>
<dataDeliveryResponse xmlns="http://geomodel.eu/schema/ws/data" xmlns:ns2="
http://geomodel.eu/schema/common/geo">
  <site id="demo" lat="48.61259" lng="20.827079">
    <metadata>#15 MINUTE VALUES OF SOLAR RADIATION AND METEOROLOGICAL
PARAMETERS AND PV OUTPUT
#
#Issued: 2017-09-03 12:40
#
#Latitude: 48.612590

```



```
#Longitude: 20.827079
#Elevation: 7.0 m a.s.l.
#http://solargis.info/imaps/#tl=Google:satellite&loc=48.612590,20.827079&z=14
#
#
#Output from the climate database Solargis v2.1.13
#
#Solar radiation data
#Description: data calculated from Meteosat MSG satellite data ((c) 2017 EUMETSAT) and from atmospheric data ((c) 2017 ECMWF and NOAA) by Solargis method
#Summarization type: instantaneous
#Summarization period: 28/04/2014 - 28/04/2014
#Spatial resolution: 250 m
#
#Meteorological data
#Description: spatially disaggregated from CFSR, CFSv2 and GFS ((c) 2017 NOAA) by Solargis method
#Summarization type: interpolated to 15 min
#Summarization period: 28/04/2014 - 28/04/2014
#Spatial resolution: temperature 1 km, other meteorological parameters 33 km to 55 km
#
#Service provider: Solargis s.r.o., M. Marecka 3, Bratislava, Slovakia
#Company ID: 45 354 766, VAT Number: SK2022962766
#Registration: Business register, District Court Bratislava I, Section Sro, File 62765/B
#http://solargis.com, contact@solargis.com
#
#Disclaimer:
#Considering the nature of climate fluctuations, interannual and long-term changes, as well as the uncertainty of measurements and calculations, Solargis s.r.o. cannot take full guarantee of the accuracy of estimates. The maximum possible has been done for the assessment of climate conditions based on the best available data, software and knowledge. Solargis s.r.o. shall not be liable for any direct, incidental, consequential, indirect or punitive damages arising or alleged to have arisen out of use of the provided data. Solargis is a trade mark of Solargis s.r.o.
#
#Copyright (c) 2017 Solargis s.r.o.
#
#
#Columns:
#Date - Date of measurement, format DD.MM.YYYY
#Time - Time of measurement, time reference UTC+2, time step 15 min, time format HH:MM
#GHI - Global horizontal irradiance [W/m2], no data value -9
#GTI - Global tilted irradiance [W/m2] (fixed inclination: 25 deg. azimuth: 180 deg.), no data value -9
#TEMP - Air temperature at 2 m [deg. C]
#WS - Wind speed at 10 m [m/s]
```

```

#WD - Wind direction [deg.]
#AP - Atmospheric pressure [hPa]
#RH - Relative humidity [%]
#PVOUT - PV output [kW]
#
#Data:
Date;Time;GHI;GTI;TEMP;WS;WD;AP;RH;PVOUT</metadata>
  <columns>GHI GTI TEMP WS WD AP RH PVOUT</columns>
  ....
  <row dateTime="2014-04-28T05:11:00.000+02:00" values="0.0 0.0 10.2 1.9
10.0 1005.4 81.2 0.0"/>
  <row dateTime="2014-04-28T05:26:00.000+02:00" values="5.0 5.0 10.4 1.9
10.0 1005.4 80.3 0.0"/>
  <row dateTime="2014-04-28T05:41:00.000+02:00" values="12.0 11.0 10.6
1.9 10.0 1005.3 79.5 2.85"/>
  <row dateTime="2014-04-28T05:56:00.000+02:00" values="25.0 25.0 10.9
2.2 10.0 1005.3 78.7 11.936"/>
  <row dateTime="2014-04-28T06:11:00.000+02:00" values="38.0 37.0 11.2
2.2 10.0 1005.2 77.9 21.25"/>
  <row dateTime="2014-04-28T06:26:00.000+02:00" values="102.0 70.0 11.9
2.2 10.0 1005.1 76.5 38.582"/>
  <row dateTime="2014-04-28T06:41:00.000+02:00" values="144.0 112.0 12.7
2.2 10.0 1005.0 75.0 68.925"/>
  <row dateTime="2014-04-28T06:56:00.000+02:00" values="183.0 156.0 13.4
2.1 9.0 1004.9 73.5 106.197"/>
  <row dateTime="2014-04-28T07:11:00.000+02:00" values="223.0 202.0 14.2
2.1 9.0 1004.8 72.1 150.239"/>
  <row dateTime="2014-04-28T07:26:00.000+02:00" values="265.0 252.0 14.8
2.1 9.0 1004.7 71.2 197.703"/>
  <row dateTime="2014-04-28T07:41:00.000+02:00" values="308.0 304.0 15.3
2.1 9.0 1004.7 70.3 248.14"/>
  <row dateTime="2014-04-28T07:56:00.000+02:00" values="354.0 359.0 15.8
1.7 8.0 1004.6 69.4 301.096"/>
  <row dateTime="2014-04-28T08:11:00.000+02:00" values="403.0 420.0 16.4
1.7 8.0 1004.6 68.4 357.374"/>
  <row dateTime="2014-04-28T08:26:00.000+02:00" values="450.0 479.0 16.9
1.7 8.0 1004.7 66.0 411.019"/>
  <row dateTime="2014-04-28T08:41:00.000+02:00" values="497.0 544.0 17.5
1.7 8.0 1004.8 63.5 468.12"/>
  <row dateTime="2014-04-28T08:56:00.000+02:00" values="539.0 599.0 18.0
1.8 26.0 1004.8 61.0 515.073"/>
  ...
  <row dateTime="2014-04-28T23:41:00.000+02:00" values="0.0 0.0 14.1 2.9
353.0 1004.8 93.3 0.0"/>
  <row dateTime="2014-04-28T23:56:00.000+02:00" values="0.0 0.0 14.0 2.8
354.0 1004.8 93.3 0.0"/>
  </site>
</dataDeliveryResponse>

```

FTP data delivery response

Responses from this service are standard Solargis CSV format files with header, metadata and data sections. Files are suitable for automated processing. Examples of CSV response files:

- hourly time-series: [Solargis_TS_hourly_sample.csv](#),
- monthly time-series: [Solargis_TS_monthly_sample.csv](#),
- monthly long-term averages: [SolarGIS_LTA_monthly_sample.csv](#)